

High-speed spindles  
LENA

**Novibra**

# LENA

Energy saving high-speed spindle

Sustainability  
in spindle operation



# OUTSTANDING

## ADVANTAGES

# LENA



### Industry Maximum Life-Time

Patented one-piece spindle insert

### Energy Saving

Due to unique 17.5 mm wharve dia

### Industry Maximum Speed

30 000 rpm

### Reduced Maintenance

Long lubrication cycles and special anti-corrosion treatment

### Flexible

Can be supplied with new machines  
or as an upgrade of existing ones

Can be fitted with any Novibra crown

### Noise Reduction

Thanks to well-proven second damping system

# Low-Energy and Noise-Absorbing Spindle LENA


LENA was designed to achieve the highest speeds with low energy consumption, achieving speeds of up to 30 000 rpm while saving on average up to 4 to 6% of energy.

## Application


Speed: up to 30 000 rpm

Tubes: up to 200 – 210 mm

Suitable for yarn count Ne30 and finer

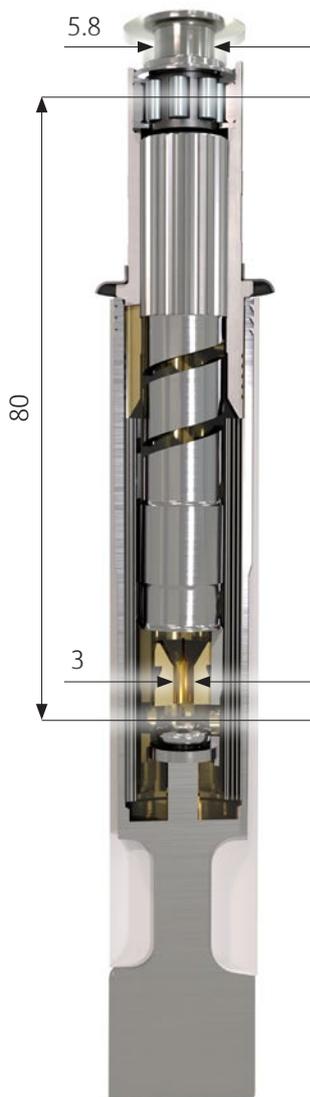

Energy consumption comparison

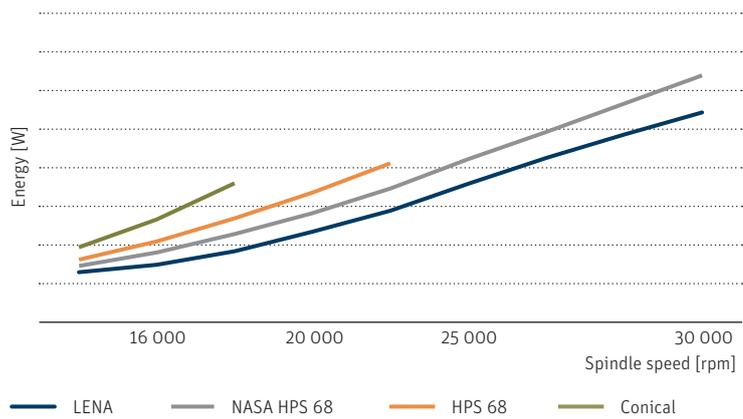

Neck bearing 5.8 mm

- wharve diameter 17.5 mm
- energy saving

Footstep bearing 3 mm

- energy saving

Pitch between bearings 80 mm

- compact design

Second damping system

- remarkably reduced neck bearing load
- low noise level



LENA with standard Novibra cutter on machine



**Novibra Boskovice s.r.o.**  
Hrádkov 2188  
68001 Boskovice  
Czech Republic  
T +420 51 652 81 84  
F +420 51 652 81 88  
sales@novibra.com

[www.novibra.com](http://www.novibra.com)

The data and illustrations in this brochure and on the corresponding data carrier refer to the date of printing. Rieter reserves the right to make any necessary changes at any time and without special notice. Rieter systems and Rieter innovations are protected by patents.

3434-v2 en 2210 • NM 06 EN